


HB3 HIGHBAY


HIGHBAY (170 lm/W)



MOUNTING TYPE: Only available for bracket mounting type

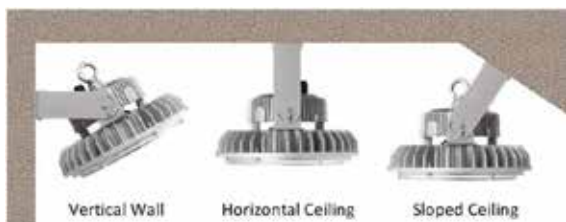

PHOTOMETRIC DATA

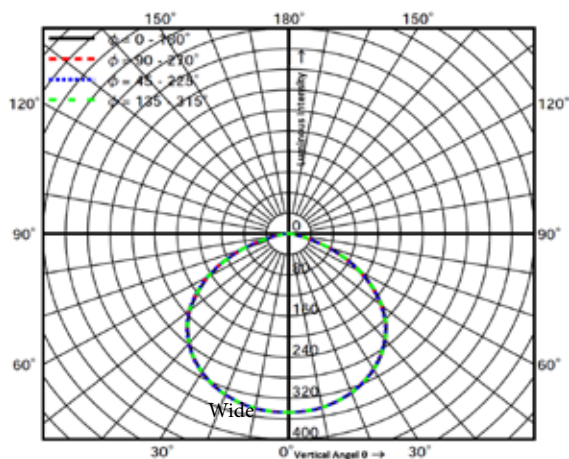

COMMON SPECIFICATIONS

- Housing: Aluminium Alloy
- Front Cover: Tempered Glass (thk=3.0mm)
- Bracket: Steel 80~160W (thk=3.0mm) ; 250W (thk=4.0mm)
- Eye Bolt: GEOMET Plate Stainless Steel
- Finish Colour: Metallic Silver
- Ingress Protection: IP65
- Impact Resistance: IK08
- Safety Wire: 2pcs included


ELECTRICAL

- LED Driver: Built in Power Supply Unit
- Input Voltage: 100 ~ 240V
- Line Frequency: 50/60Hz

OPTICAL

- Lumen Maintenance: 40,000hrs (L90)
- Distribution: Wide Beam

BRACKET DIMENSION

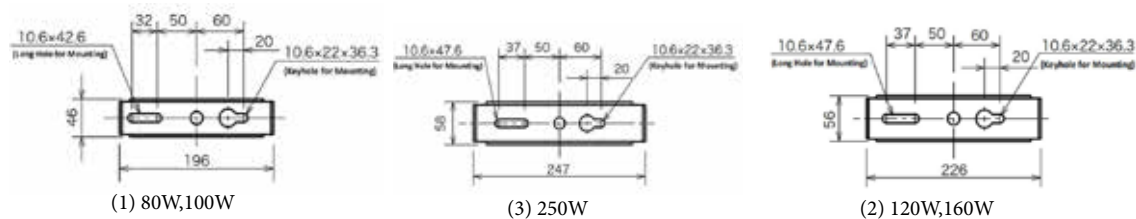

Model No.	EHWP0814W/740		EHWP0814W/750		EHWP0815W/740		EHWP0815W/750	
Power Consumption (W)	80							
Mounting Type	Bracket				Eye Bolt			
CCT (K)	4000		5000		4000		5000	
CRI	≥70							
Luminous Flux (lm)	13,600							
Luminous Efficacy (lm/w)	170.0							
Power Factor (PF) @ full load	≥ 0.95							
Net Weight (kg)	3.4				2.7			



Model No.	EHWP1014W/740	EHWP1014W/750	EHWP1015W/740	EHWP1015W/750
Power Consumption (W)	100			
Mounting Type	Bracket		Eye Bolt	
CCT (K)	4000	5000	4000	5000
CRI	≥70			
Luminous Flux (lm)	16,900			
Luminous Efficacy (lm/w)	169.0			
Power Factor (PF) @ full load	≥ 0.95			
Net Weight (kg)	3.4		2.7	

Model No.	EHWP1214W/740	EHWP1214W/750	EHWP1215W/740	EHWP1215W/750
Power Consumption (W)	120			
Mounting Type	Bracket		Eye Bolt	
CCT (K)	4000	5000	4000	5000
CRI	≥70			
Luminous Flux (lm)	21,000			
Luminous Efficacy (lm/w)	175.0			
Power Factor (PF) @ full load	≥ 0.95			
Net Weight (kg)	4.7		3.9	

Model No.	EHWP1614W/740	EHWP1614W/750	EHWP1615W/740	EHWP1615W/750
Power Consumption (W)	160			
Mounting Type	Bracket		Eye Bolt	
CCT (K)	4000	5000	4000	5000
CRI	≥70			
Luminous Flux (lm)	27,300			
Luminous Efficacy (lm/w)	170.6			
Power Factor (PF) @ full load	≥ 0.95			
Net Weight (kg)	4.7		3.9	

Model No.	EHWP2514W/740	EHWP2514W/750	EHWP2515W/740	EHWP2515W/750
Power Consumption(W)	250			
Mounting Type	Bracket		Eye Bolt	
CCT(K)	4000	5000	4000	5000
CRI	≥70			
Luminous Flux (lm)	42,200			
Luminous Efficacy (lm/w)	168.0			
Power Factor (PF) @ full load	≥ 0.95			
Net Weight (kg)	8.6		7.8	

ACCESSORY

Model No.	GEHC10	GEHC11	GEHC03	FB21	FB31
Product Name	Front Guard S (for 80W,100W)	Front Guard M (for 120W,160W)	Front Guard L (for 250W)	Chain Mounting Kit	Ceiling Mounting Kit