




SPIKY 12W

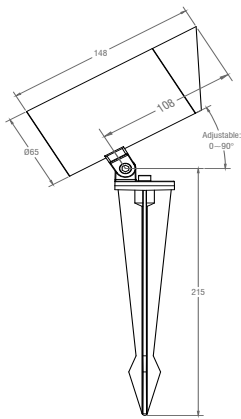

LED Type: CREE COB

Ingress Protection test: IP65

Housing: Die-cast Aluminium
 Clear Tempered Glass Cover
 PC Chromed Reflector
 Stainless Screws & Waterproof Kits
 incl. 3M H07RN-F Neoprene Cable

Finish: Electrostatic Powder Coating
 /Sand Black


Lumen Maintenance: (L70) 30,000 hrs

Gear: HEP Integrated & Constant
 Current Driver

Model No.	SPIKY 12W
Power Consumption (W)	12
CCT (K)	3000
CRI	≥80
Luminous Flux (lm)	1000
Power Factor (PF)	≥ 0.9
Input Voltage (V)	220-240
Operating Temp. (°C)	-20~ +45
Beam Angle	24
Frequency (Hz)	50/60
Carton Dimension LxWxH (mm)	500x320x340
Gross Weight/ pcs (kg)	1



SPIKY 20W

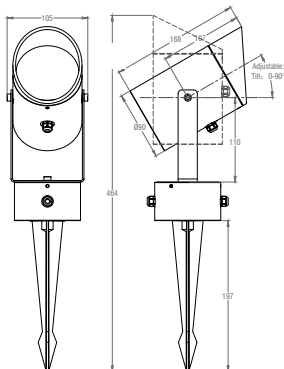

LED Type: CREE COB

Ingress Protection test: IP65

Housing: Die-cast Aluminium
 Clear Tempered Glass Cover
 PC Chromed Reflector
 Stainless Screws & Waterproof Kits
 incl. 3M H07RN-F Neoprene Cable

Finish: Electrostatic Powder Coating
 /Sand Black

Lumen Maintenance: (L70) 30,000 hrs

Gear: HEP Integrated & Constant
 Current Driver

Model No.	SPIKY 20W
Power Consumption (W)	20
CCT (K)	3000
CRI	≥80
Luminous Flux (lm)	1600
Power Factor (PF)	≥ 0.9
Input Voltage (V)	220-240
Operating Temp. (°C)	-20~ +45
Beam Angle	38
Frequency (Hz)	50/60
Carton Dimension LxWxH/12pcs (mm)	565x285x290
Gross Weight/ 12pcs (kg)	2.35