

HALO

CEILING LIGHT



FEATURES

- High efficiency LED Wall Light 104 lm/W.
- IP40 ,IK06 protection against moisture and dust.
- Easy and quick installation and maintenance.
- Non dim and triac dimming option.
- Microwave sensor optional


APPLICATION

Common applications: Walkway, corridor ,staircases, lobby etc.



PRODUCT DIMENSION

*Typical Dimension (mm)

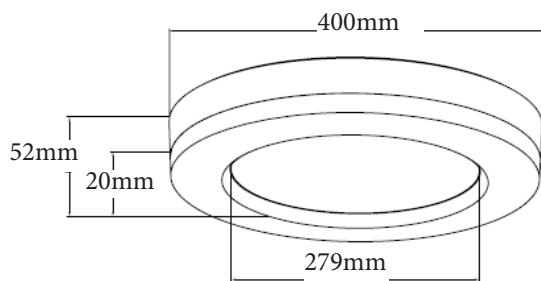


INSTALLATION

Ceiling mounted



Wall mounted

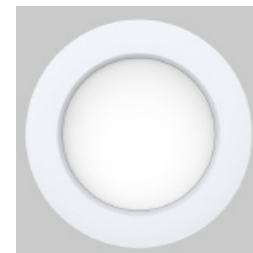

Model	ELAP HALO 25W-3C
Power Consumption(W)	25
Luminaire Flux ± 5%(lm)	2400
Beam Angle °	120°
Input Voltage (Vac)	200—240
Input Current(mA)	≤0.14A
Power Factor(PF)	0.9
Efficiency(%)	≥85
THD(%)	<20% @230V
Net Weight/pc(kgs)	1.65
Quantity /Carton	6pcs

Note: The above specified lumen and system subject to changes without prior notice.

TECHNICAL SPECIFICATION

ELECTRICAL SYSTEM

Input Voltage	Insulation Class	LED Driver
220-240Vac, 50/60Hz,	Class II	Constant current Driver

Light Source	LED Type	(CRI)	Life Time Residual Flux	Optical System
SMD	2835	≥80	50,000 hours	Internal Aluminium reflector/PC

CERTIFICATION & COMPLIANCE TEST

- : EN/IEC 55015
- : EN/IEC 61547
- : EN/IEC 61000-3-2
- : EN 61000-3-3
- : EN/IEC 60598-1
- : EN/IEC 60598-2-1
- : EN 62493

FIXTURE/HOUSING

- Housing: Die-Cast Aluminium
- Diffuser: Opal PC
- Reflector: Aluminium, mirror finish