

WL80

WALL LIGHT



FEATURES

- Frameless wall lamp
- High efficiency LED Wall Light 100 lm/W.
- IP65 ,IK08 protection against moisture and dust.
- Easy and quick installation and maintenance.
- PIR Sensor available.
- Non dim and triac dimming option.


APPLICATION

Common applications: Perimeter lighting for warehouse, walkway, corridor & townhouse, hotel, restaurant, pathway etc



PRODUCT DIMENSION

*Typical Dimension (mm)

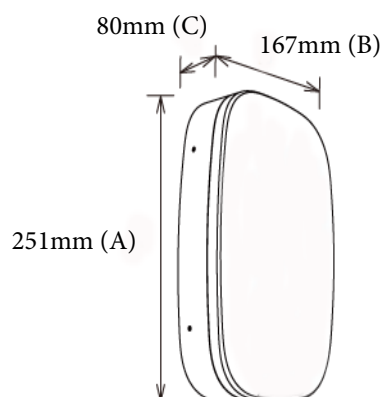

COLOR TEMPERATURE

Slide switch to select desired CCT



WW:3000K



NW:4000K



CW:5700K

Model	WL80-12-3C	WL80-18-3C
Power Consumption(W)	12	18
Luminaire Flux $\pm 5\%$ (lm)	1400	1900
Beam Angle °	120°	
Input Voltage (Vac)	200V—240	
Input Current(mA)	0.07	0.1
Power Factor(PF)	0.9	
Efficiency(%)	$\geq 85\%$	$\geq 87\%$
THD(%)	<20%	
Driving Current $\pm 5\%$ (mA)	160 $\pm 5\%$	230 $\pm 5\%$
Net Weight/pc(kgs)	0.95	
Gross Weight/carton (kg)	14	
Carton Dimension L x W x H (mm)	52.5x38.5x30.5	

PIR sensor available upon request.

Note: The above specified lumen and system subject to changes without prior notice.

TECHNICAL SPECIFICATION
ELECTRICAL SYSTEM

Input Voltage	Insulation Class	LED Driver
220-240Vac, 50/60Hz,	Class 1	Constant current Driver

Light Source	LED Type	(CRI)	Life Time Residual Flux	Optical System
SMD	2835	≥ 80	50,000 hours	Internal Aluminium reflector/PC

CERTIFICATION & COMPLIANCE TEST

: EN/IEC 55015
: EN 61547
: EN/IEC 61000-3-2
: EN 61000-3-3

FIXTURE/HOUSING

- Housing: ADC 12 Die-Cast Aluminium
- Diffuser: Opal PC